

# 1600 SECONDARY BEER REGULATOR SERIES



## The TAPRITE ADVANTAGE

- High CO2 volumetric flow provides continuity in product dispensing
- Primary regulators connect directly to gas source
- Recommended operating pressure should be limited to 2/3 of the gauge range for maximum accuracy
- UL approved per UL252 class IV rating for CO2
- Polycarbonate bonnet will not chip, break or fade
- 10 Micron filter built in to keep contaminants out of regulator
- One repair kit for primary and secondary
- Used primarily for Beer but can be used for other applications.

Model Number	Description
T1660SN60	Body only, 0-50 PSI
T1660SN60-01	Body only with metal bracket
T1661ST	1P X 1P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff
T1661ST-01	1P x 1P, 60lb gauge, 1/4" flare inlet/thru, 5/16" barb shutoff
T1661ST-02	1P x 1P, 60lb gauge, 3/8" barb inlet/thru, 5/16" barb shutoff
T1661ST-2N	1P x 1P, 60lb gauge, 5/16" barb inlet/ thru, 5/16" barb shutoff
T1661STC	1P x 1P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff with check
T1661STC-01	1P x 1P, 60lb gauge, 5/16" barb inlet/thru, 5/16" barb shutoff with check
T1672ST	2P x 2P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff



T1661ST



T1693ST-2N



# 1600 SECONDARY BEER REGULATOR SERIES



Model Number	Description
--------------	-------------

T1672STA	2P x 2P, 60lb gauge, 1/4" flare inlet/thru, 5/16" barb shutoff
----------	--

T1672STM	2P x 2P, 60lb gauge, 5/16" barb inlet/thru, 5/16" barb shutoff
----------	--

T1672ST-2N	2P x 2P, 60lb gauge, 5/16" barb inlet/thru, 5/16" barb shutoff
------------	--

T1672STWМК	2P x 2P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff, 8 1/2" x 11" panel, with 2 beer Y's
------------	--

T1672STC-01	2P x 2P, 60lb gauge, 5/16" barb inlet/thru, 5/16" barb shutoff with check
-------------	---

T1672STC-02	2P x 2P, 60lb gauge, no inlet/thru fittings, 5/16" barb shutoff with check valve
-------------	--

T1683ST	3P x 3P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff
---------	---

T1683ST-2N	3P x 3P, 60lb gauge, 5/16" barb inlet/thru 5/16" barb shutoff
------------	---

T1683STWМК	3P x 3P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff, 8 1/2" x 16" panel with 3 beer Y's
------------	---

T1683STC-01	3P x 3P, 60lb gauge, 5/16" barb inlet/thru 5/16" barb shutoff with check
-------------	--

T1683STC-02	3P x 3P, 60lb gauge, no inlet/thru fittings, 5/16" barb shutoff with check valve
-------------	--

T1694ST	4P x 4P, 60lb gauge, 5/16" barb inlet, 5/16" barb shutoff
---------	---

T1694ST-2N	4P x 4P, 60lb gauge, 5/16" barb inlet/thru 5/16" barb shutoff
------------	---


T1694STWМК	4P x 4P, 60lb gauge, 5/16" barb inlet 5/16" barb shutoff, 8 1/2" x 21" panel with 4 beer Y's
------------	--

T1694STC-01	4P x 4P, 60lb gauge, 5/16" barb inlet/thru 5/16" barb shutoff with check
-------------	--

T1694STC-02	4P x 4P, 60lb gauge, no inlet/thru fittings, 5/16" barb shutoff with check valve
-------------	--



T1684ST-2N

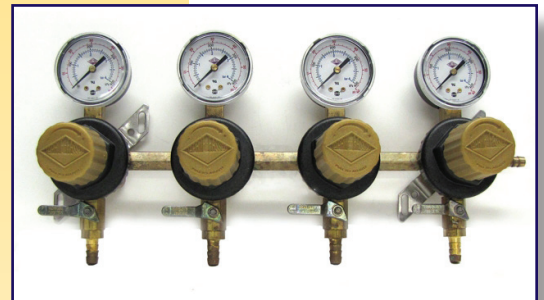

T1694ST

