


959BX5-E ENVELOPE

TECHNICAL SPECIFICATIONS

SAFETY DEVICE APPROVED BY BUREAU OF EXPLOSIVES,
 FILE 25-16-242-25AG DATED JUNE 27, 1957.
 FLOW CAPACITY 852 CU FT PER MIN AT 500 PSIG AT
 60°F AND 14.7 PSIA.
 WATER CAPACITY OF 538 POUNDS FOR LIQUEFIED GAS.

REVISIONS

A	HH	8-25-06	C.N.XXXXX
CREATED NEW DRAWING			

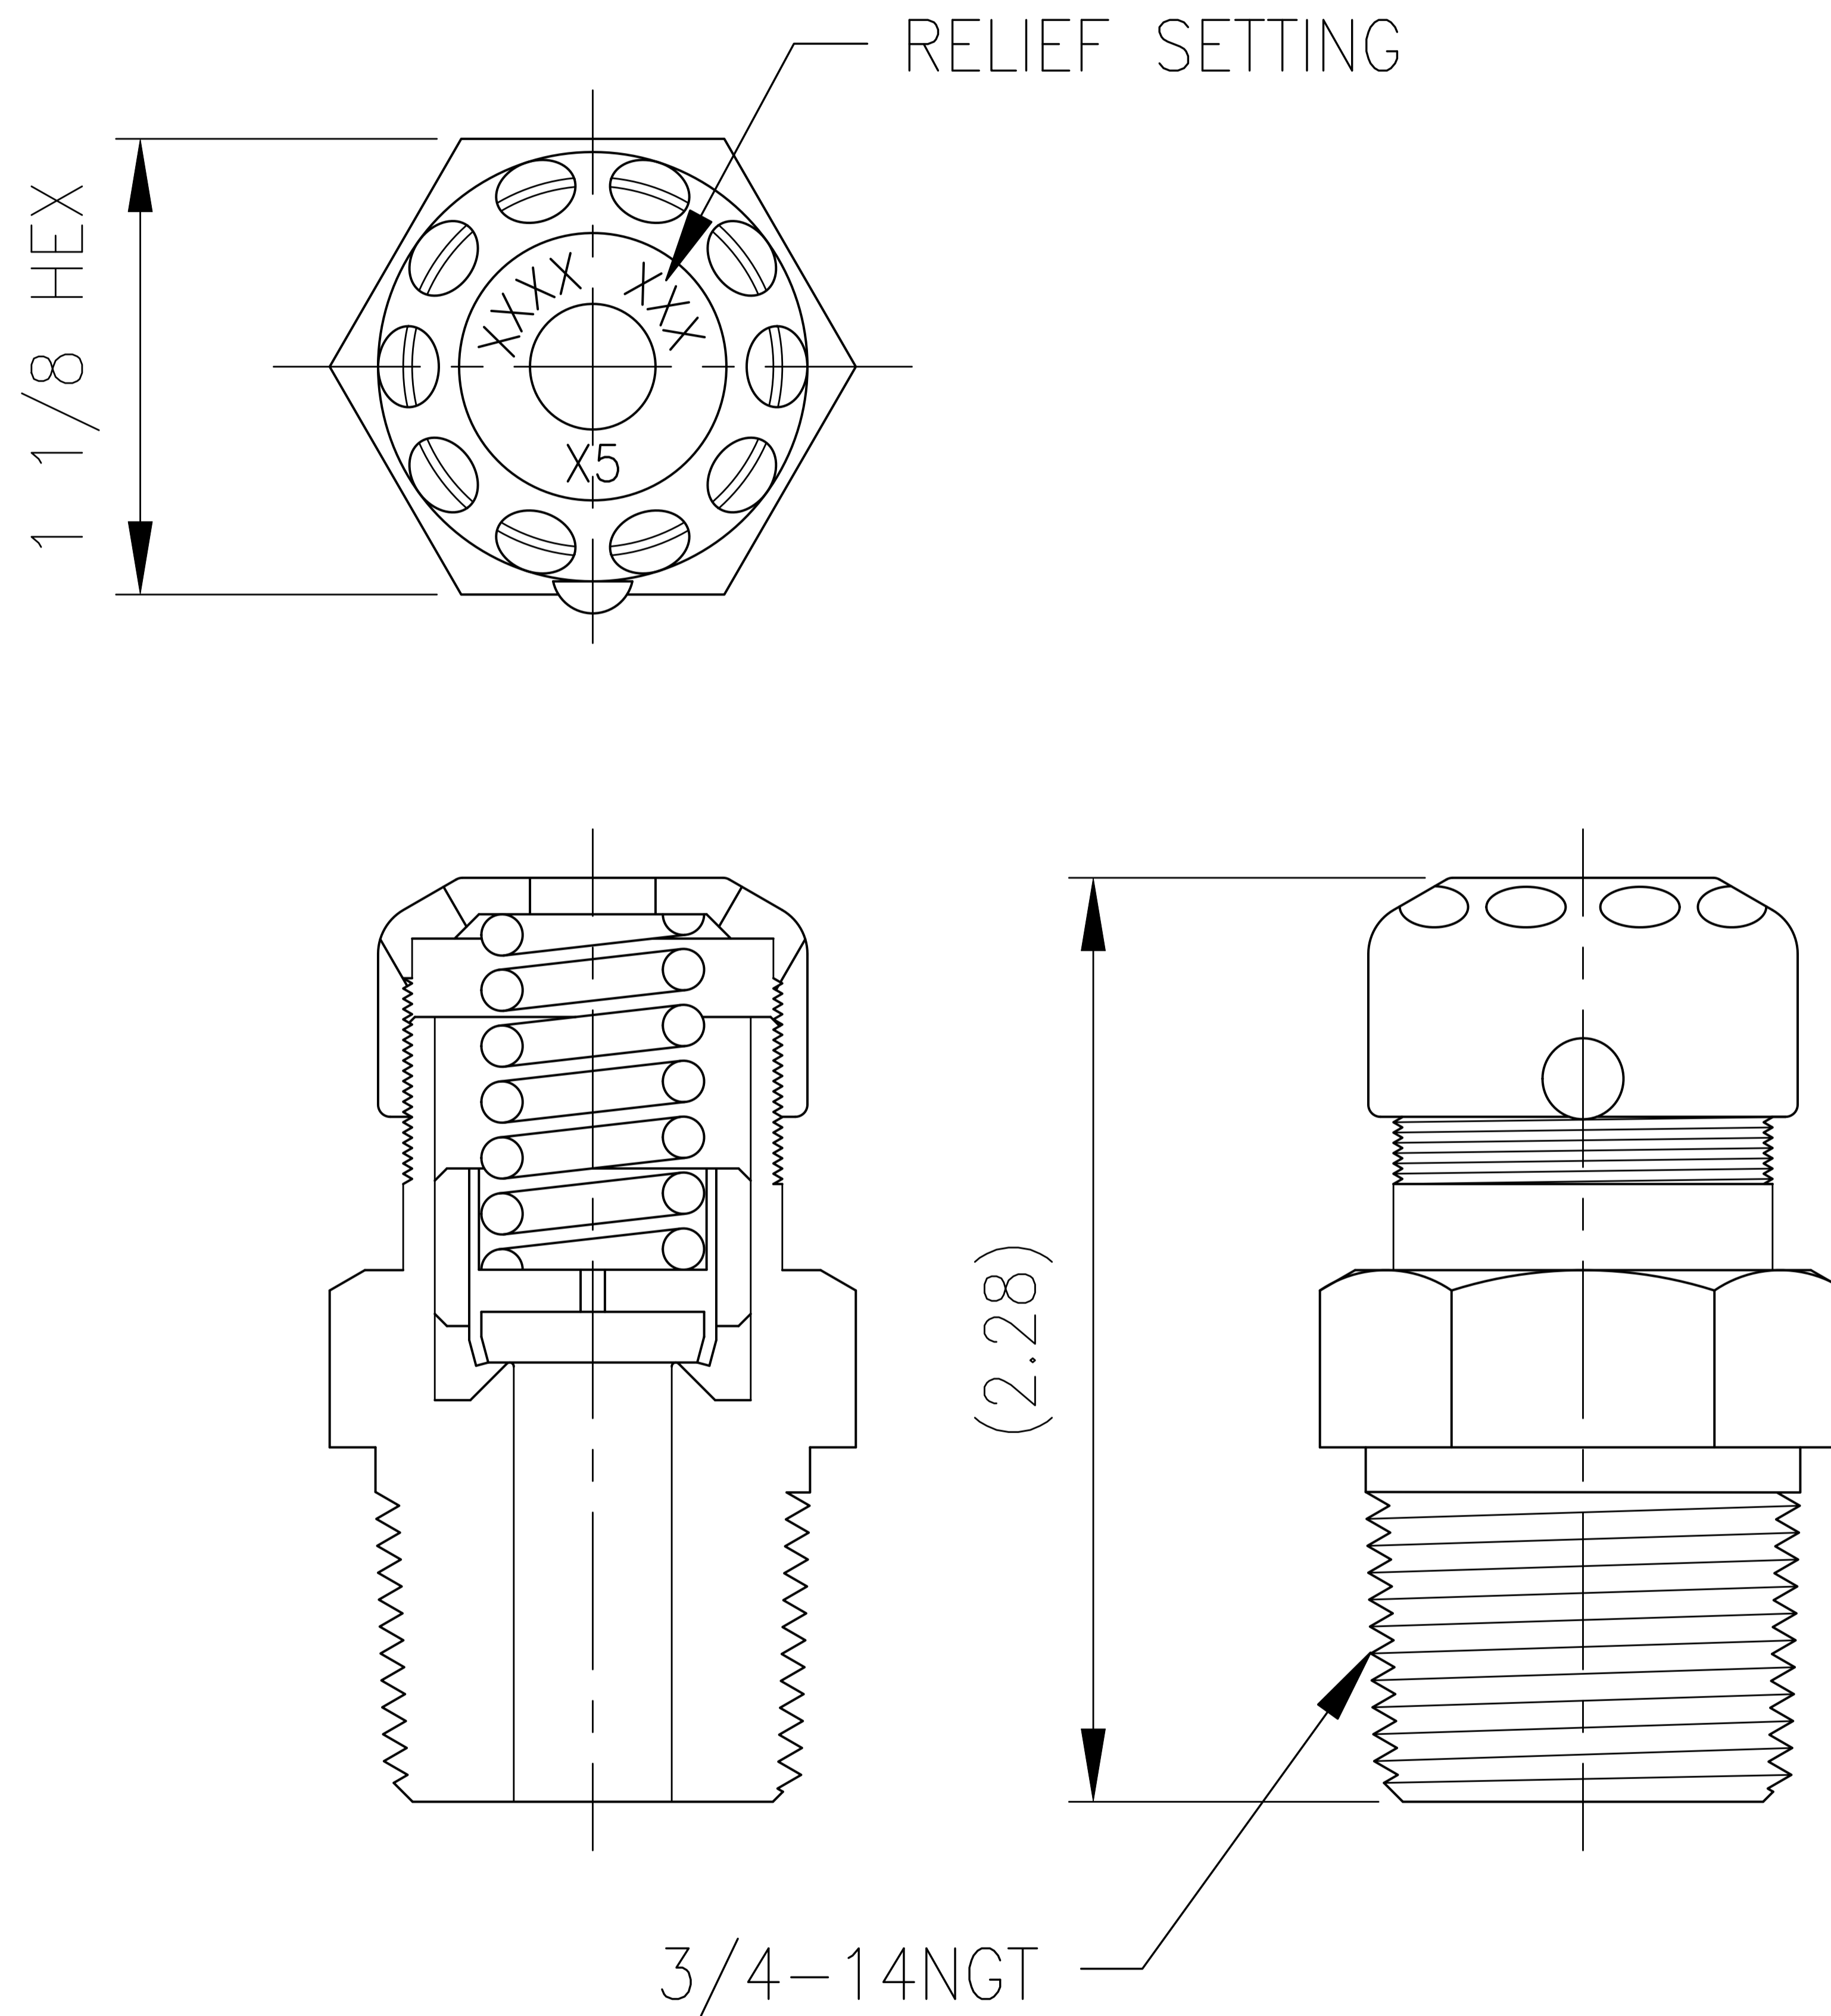

MATERIALS OF CONSTRUCTION:

ITEM	MATERIAL
ADJUSTUNG NUT	BRASS C36000
DRIVE SCREW	STEEL, ZINC PLATED
SPRING	302 STAINLESS STEEL
SEAT HOLDER	BRASS C36000
SEAT DISC	TEFLON
BODY	BRASS C36000

PROPRIETARY INFORMATION:
 INCLUDED HEREIN IS INFORMATION PROPRIETARY
 TO SHERWOOD DIV. HARSCO CORPORATION.
 THIS INFORMATION IS FURNISHED IN CONFIDENCE
 SUBJECT TO RETURN UPON DEMAND BY
 SHERWOOD DIV. THIS DRAWING SHALL NOT BE
 RELEASED OUTSIDE THE ORGANIZATION TO
 WHOM SENT BY SHERWOOD NOR USED,
 DUPLICATED OR DISCLOSED IN WHOLE OR IN
 PART FOR ANY PURPOSE WHATSOEVER EXCEPT
 AS AUTHORIZED IN WRITING BY SHERWOOD DIV.



959BX5-E SERIES
 RELIEF VALVE

DRAWN	H.HOLLIS	8-25-06	 DO NOT SCALE DWG
CHECKED			
APPROVED			

CATALOG/PART NO.	FORMAT- A
DWG. NO. 959BX5-E ENVELOPE	REV A